


# Series "VERSUZ"

**MODEL:** VERSUZ LED / 600mm / SURFACE,SUSPENDED / 10W / 1140lm / CRI>80RA / CCT 4000K / ECG / IP21 / OPAL HIGH DIFFUSIVE / ANODIZED ALUMINUM  
**CODE:** VerS/P.60-10-1140/10.4/IP21O5A  
**LED LIGHT SOURCE**

*Mareli Ltd*  
www.mareli-bg.com

## STANDARD



on request

## DESCRIPTION

### MOUNTING

Surface / Suspended

### LIGHT SOURCE

LED

### OPTICAL SYSTEM

Diffuser

### MATERIALS

Housing - Anodised aluminium profile  
 Diffuser - Opal PMMA high diffusive  
 End caps - Anodised aluminium

### WIRING

Input Voltage: 170-240VAC 50-60Hz  
 Ambient Temp: -10~35 °C  
 Supplied with white cable (3x0.5mm<sup>2</sup> L=600mm)

### LIGHT DISTRIBUTION

Direct


### SURFACE FINISH

Housing & End caps - anodised aluminium

### ADVANTAGES

- Net lumen output 1140 lm
- Color rendering index >80 Ra
- CCT 4000K
- Durable and Long service life
- No Infrared radiation
- No UV rays
- 50,000 hrs lifetime
- 5 years warranty

Areas of application

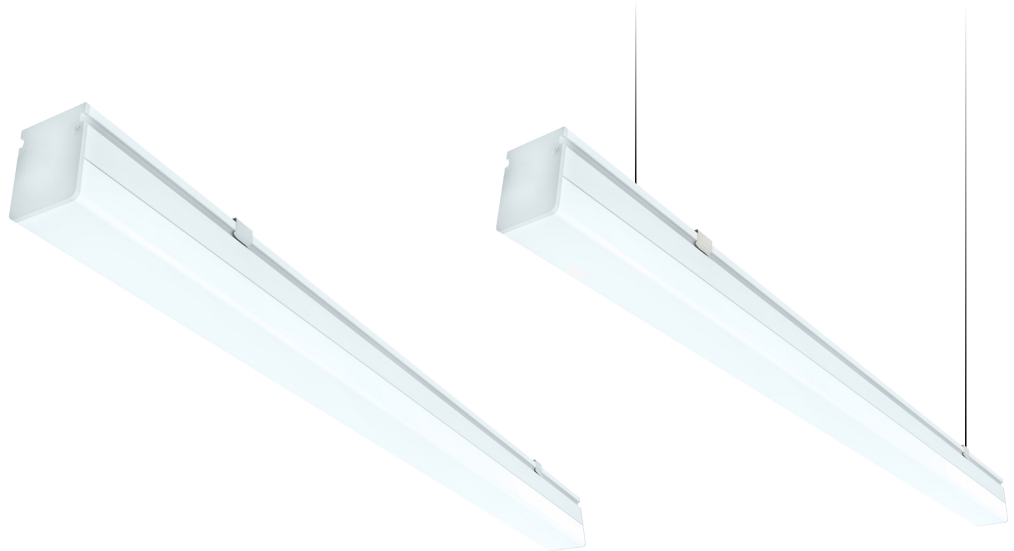

### ACCESSORIES

Single suspender 1.5 m (ORDER CODE: ACSus/VerP 1/1.5)  
 Transparent Feeding Cable for Versuz Surface and Suspended  
 3 X 0.75mm<sup>2</sup>. VDE certified cable L=1m ( the length of the cable can be different ) (ORDER CODE: AC/TC/Ver 3/1\*)



energy saving



eco friendly



maintenance free




no UV/IR rays



5 years warranty

## VerS/P.60-10-1140/10.4/IP21O5A

|             |                             |
|-------------|-----------------------------|
| <b>Ver</b>  | Versuz - Name of luminaire  |
| <b>S/P</b>  | Surface, Suspended mounting |
| <b>60</b>   | ~600mm Length               |
| <b>10</b>   | Power (W)                   |
| <b>1140</b> | Net lumen output            |
| <b>10.4</b> | 10.4 = CCT: 4000K           |
| <b>IP21</b> | Ingress protection          |
| <b>O5</b>   | Opal PMMA high diffusive    |
| <b>A</b>    | Anodised housing            |

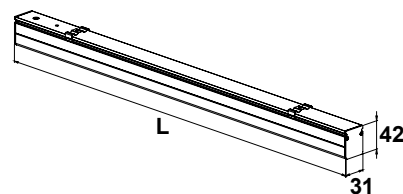

| CODE                           | OPTICAL SYSTEM          | POWER | LIGHT SOURCE | NET LUMEN OUTPUT | COLOR RENDERING INDEX | COLOR TEMPERATURE | DIMENSIONS | WEIGHT |
|--------------------------------|-------------------------|-------|--------------|------------------|-----------------------|-------------------|------------|--------|
|                                | DIFFUSER                | (W)   |              | (lm)             | (Ra)                  | (K)               | (mm)       | (kg)   |
|                                | OPALPMMA HIGH DIFFUSIVE |       |              |                  |                       |                   |            |        |
| VerS/P.60-10-1140/10.3/IP21O5A | +                       | 10    | LED          | 1140             | >80                   | 400               | L: 586     | 0.34   |