


Series "VERSUZ"

MODEL: VERSUZ LED / 900mm / SURFACE,SUSPENDED / 12.5W / 1300lm / CRI>80RA / CCT 3000K / ECG / IP21 / OPAL HIGH DIFFUSIVE / ANODIZED ALUMINUM
CODE: VerS/P.90-12.5-1300/10.3/IP21O5A
LED LIGHT SOURCE

Mareli Ltd
www.mareli-bg.com

STANDARD



on request

DESCRIPTION

MOUNTING

Surface / Suspended

LIGHT SOURCE

LED

OPTICAL SYSTEM

Diffuser

MATERIALS

Housing - Anodised aluminium profile
 Diffuser - Opal PMMA high diffusive
 End caps - Anodised aluminium

WIRING

Input Voltage: 170-240VAC 50-60Hz
 Ambient Temp: -10~35 °C
 Supplied with white cable (3x0.5mm² L=600mm)

LIGHT DISTRIBUTION

Direct



SURFACE FINISH

Housing & End caps - anodised aluminium

ADVANTAGES

- Net lumen output 1300 lm
- Color rendering index >80 Ra
- CCT 3000K
- Durable and Long service life
- No Infrared radiation
- No UV rays
- 50,000 hrs lifetime
- 5 years warranty

Areas of application

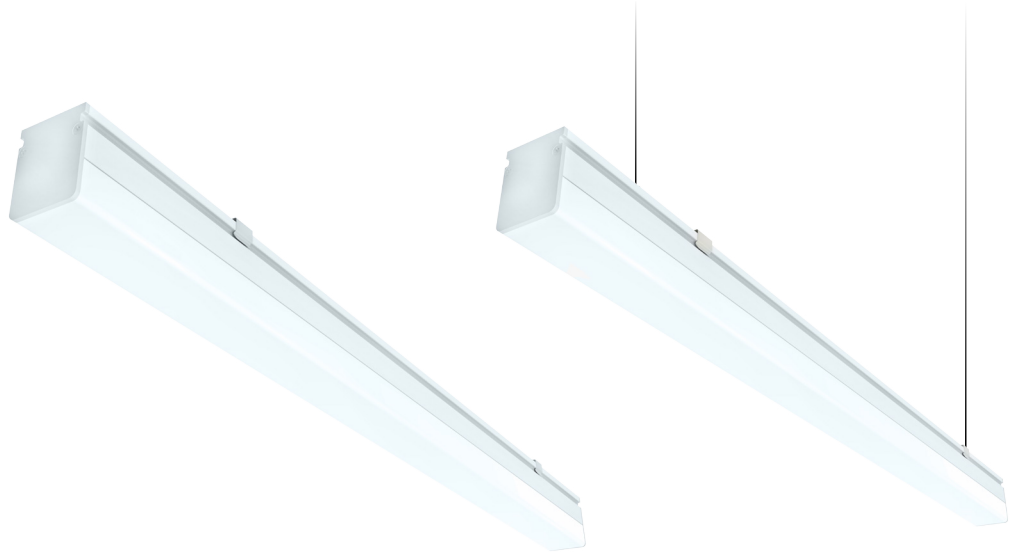

ACCESSORIES

Single suspender 1.5 m (ORDER CODE: ACSus/VerP 1/1.5)
 Transparent Feeding Cable for Versuz Surface and Suspended
 3 X 0.75mm². VDE certified cable L=1m (the length of the cable can be different) (ORDER CODE: AC/TC/Ver 3/1*)



energy saving



eco friendly



maintenance free




no UV/IR rays



5 years warranty

VerS/P.90-12.5-1300/10.3/IP21O5A

Ver	Versuz - Name of luminaire
S/P	Surface, Suspended mounting
90	~900mm Length
12.5	Power (W)
1300	Net lumen output
10.3	10.3 = CCT: 3000K
IP21	Ingress protection
O5	Opal PMMA high diffusive
A	Anodised housing

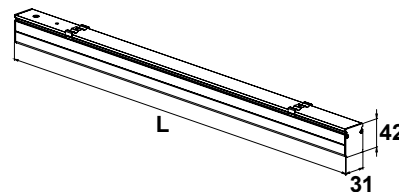

CODE	OPTICAL SYSTEM	POWER	LIGHT SOURCE	NET LUMEN OUTPUT	COLOR RENDERING INDEX	COLOR TEMPERATURE	DIMENSIONS	WEIGHT
	DIFFUSER	(W)		(lm)	(Ra)	(K)	(mm)	(kg)
	OPALPMMA HIGH DIFFUSIVE							
VerS/P.90-12.5-1300/10.3/IP21O5A	+	12.5	LED	1300	>80	3000	L: 874	0.48