

Series "VERSUZ"


MODEL: VERSUZ LED / 1200mm / SURFACE,SUSPENDED / 19W / 2195lm / CRI>80RA / CCT 4000K / ECG / IP21 / OPAL HIGH DIFFUSIVE / ANODIZED ALUMINUM / On/Off Switch

CODE: VerS/P.120-19-2195/10.4/IP21O5A-on/off

LED LIGHT SOURCE

Mareli Ltd
www.mareli-bg.com

STANDARD



on request

DESCRIPTION

MOUNTING

Surface / Suspended

LIGHT SOURCE

LED

OPTICAL SYSTEM

Diffuser

MATERIALS

Housing - Anodised aluminium profile

Diffuser - Opal PMMA high diffusive

End caps - Anodised aluminum

WIRING

Input Voltage: 170-240VAC 50-60Hz

Ambient Temp: -10~35 °C

Supplied with white cable (3x0.5mm² L=600mm)

LIGHT DISTRIBUTION

Direct



SURFACE FINISH

Housing & End caps - anodised aluminum

ADVANTAGES

- Net lumen output 2195 lm
- Color rendering index >80 Ra
- CCT 4000K
- Durable and Long service life
- No Infrared radiation
- No UV rays
- 50,000 hrs lifetime
- 5 years warranty

Areas of application

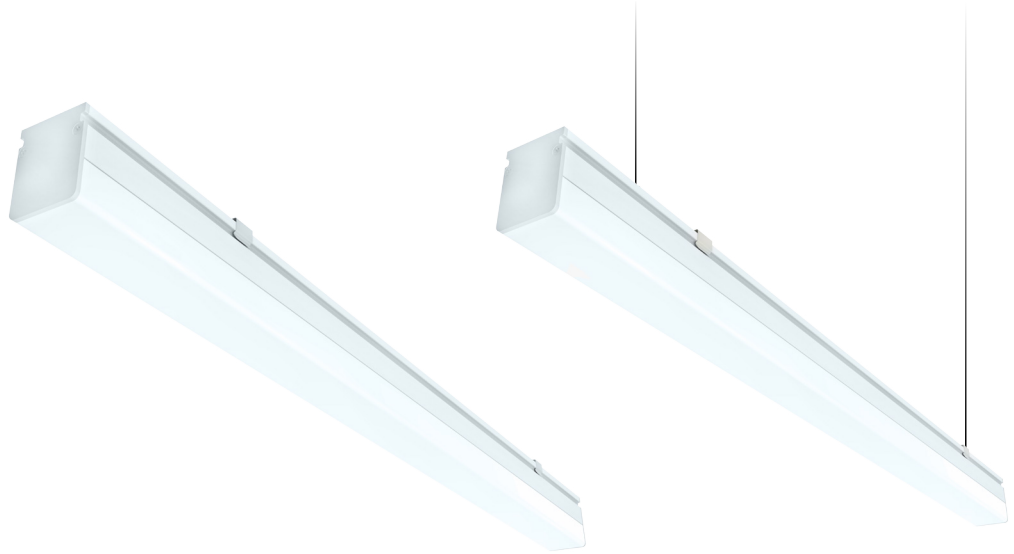

ACCESSORIES

Single suspender 1.5 m (ORDER CODE: ACSus/VerP 1/1.5)

Transparent Feeding Cable for Versuz Surface and Suspended

3 X 0.75mm². VDE certified cable L=1m (the length of the cable can be different) (ORDER CODE: AC/TC/Ver 3/1*)



Rocker switch



energy saving



eco friendly



maintenance free




UV/IR no UV/IR rays



5 years warranty

VerS/P.120-19-2195/10.4/IP21O5A-on/off

Ver	Versuz - Name of luminaire
S/P	Surface, Suspended mounting
120	1200mm Length
19	Power (W)
2195	Net lumen output
10.4	10.4 = CCT: 4000K
IP21	Ingress protection
O5	Opal PMMA high diffusive
A	Anodised housing
on/off	On/Off switch

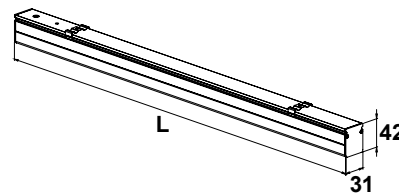

CODE	OPTICAL SYSTEM	POWER	LIGHT SOURCE	NET LUMEN OUTPUT	COLOR RENDERING INDEX	COLOR TEMPERATURE	DIMENSIONS	WEIGHT
	DIFFUSER	(W)		(lm)	(Ra)	(K)	(mm)	(kg)
	OPALPMMA HIGH DIFFUSIVE							
VerS/P.120-19-2195/10.4/IP21O5A-on/off	+	19	LED	2195	>80	4000	L: 1162	0.62