

# Series "Dorado III"


DORADO 3 / RECESSED, PLASTERBOARD / DIMENSION 220mm / 22W / 2463 lm / ECG / 830 / IP43 / OPAL

CODE: DOR3-220-22-2463/9.3/IP43O3W

LED LIGHT SOURCE

*Mareli Ltd*  
www.mareli-bg.com

## STANDARD



on request



## DESCRIPTION

### MOUNTING

Recessed / Plasterboard

### LIGHT SOURCE

LED

### OPTICAL SYSTEM

Diffuser

### MATERIALS

Housing - Aluminium

Diffuser - Opal (PMMA Mat Pattern)

### WIRING

Electronic control gear

On request: dimmable electronic control gear (DALI)

### LIGHT DISTRIBUTION

Direct

### SURFACE FINISH


Housing - white mat color (RAL9003);

other colors on request

### Advantages


- Net lumen output 2463 lm
- 112 lm/W
- Color rendering index >80 Ra
- Color temperature 3000K
- Durable and Long service life
- No Infrared radiation
- No UV rays
- Can be easily controlled and programmed
- IP43 Ingress protection
- 50,000 hrs lifetime

### Areas of application



## DOR3-220-22-2463/9.3/IP43O3W

<b>DO3</b>	Dorado 3
<b>R</b>	Recessed, Plasterboard
<b>220</b>	Dimensions (mm)
<b>22</b>	Power (W)
<b>2463</b>	Net lumen output (lm)
<b>9.3</b>	9 - Electronic control gear 3 - CCT: 3000K
<b>IP43</b>	Ingress protection
<b>O3</b>	Opal PMMA Mat Pattern
<b>W</b>	White mat color; other colors on request

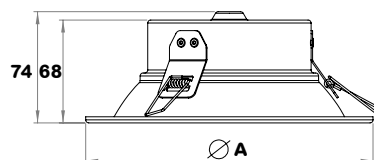

mounting hole  $\varnothing A$  minus (-) 20mm

CODE	OPTICAL SYSTEM	POWER	LIGHT SOURCE	NET LUMEN OUTPUT	COLOR RENDERING INDEX	COLOR TEMPERATURE	DIMENSIONS	WEIGHT
	DIFFUSER	(W)		(lm)	(Ra)	(K)	(mm)	(kg)
	OPAL							
DOR3-220-22-2463/9.3/IP43O3W	+	22	LED	2463	>80	3000	A: 220	0,70